

oslo 
BLINDS W.A.

Starter Guide



Aluminium Venetian

custom made

oslo 
BLINDS W.A.

Aluminium Venetian

custom made


Preview

Aluminium venetian offer a flexible approach to window shading. Unlike other kinds of blinds, they are not confined to being simply closed or open, but may be angled to deflect direct light while continuing to make the best use of natural conditions.



Benefits of Aluminium Venetian:

- Good in wet area.
- Minimal stack when pulled up.
- Light weight.

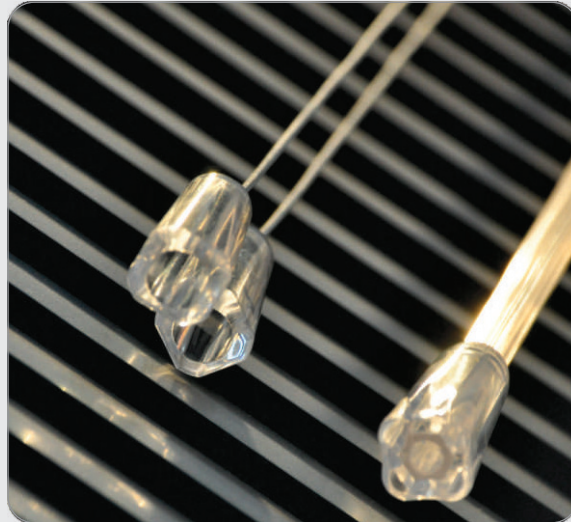

Colour Selection


25mm Aluminium

Basic White	Snow White
Cotton	Raw Silk
Silver	Brush Aluminium


* The color shown on the brochure might be slightly different due to the printing. Please contact us for further information.

GENERAL SPECIFICATIONS:

- Cord operation including cord lock, with wand tilter.
- 25mm wide aluminium, available in both 0.18mm and 0.21mm thicknesses.
- 10x19mm metal bottomrail.
- 23.8x24.8mm metal headrail.
- Limitation : maximum width is 3200mm, maximum drop is 2400mm, minimum width is 135mm, minimum drop is 300mm and blind size should not exceed 5.5m²



Outside mount



Inside mount