



SERIES 48 - CLASSIQUE



Product Information



Traxwest Pty Ltd Trading as
Oslo Blinds W.A.
Unit 3/ 17 Gibberd Road Balcatta W.A. 6021
Ph: 08 9240 1234 Fax: 08 9240 1169
Email: osloblindswa@traxwest.com.au

SERIES 48 -CLASSIQUE

1 November 2010

1. Fabrics.

a. Polaris (25mm and 45mm Cell Size) Translucent

- i. S. White 002
- ii. Onion 003
- iii. Tan 010
- iv. Terracotta 011
- v. Cocoa 012
- vi. Avocado 015
- vii. Pink Flamingo 017
- viii. Stone Red 018
- ix. Bordeaux 020
- x. Marine Blue 022
- xi. Jean Blue 024
- xii. Black 025
- xiii. Wisteria 026
- xiv. Royal Purple 027

b. Duo Tone (25mm Only) Translucent

- i. H 22001
- ii. H 22002
- iii. H 22008
- iv. H 22003
- v. H 22009
- vi. H 22013
- vii. H 22006
- viii. H 22005
- ix. H 22011
- x. H 22012
- xi. H 22007
- xii. H 22014
- xiii. H 22004
- xiv. H 22010

c. Fulltone (25mm Only) Translucent

- i. HS 25001
- ii. HS 25003
- iii. HS 25002
- iv. HS 25004
- v. HS 25007
- vi. HS 25008
- vii. HS 25005
- viii. HS 25006
- ix. HS 25011
- x. HS 25009
- xi. HS 25010
- xii. HS 25014

d. Emboss (25mm Only) Translucent

- i. S. White 002
- ii. Onion 003
- iii. Biscuit 007
- iv. Cocoa 012
- v. Marine Blue 022
- vi. Water Green 014
- vii. Avocado 015
- viii. Grey Sheen 021
- ix. Royal Purple 027
- x. Bordeaux 020

e. Sheer (25mm Only) Sheer

- i. SR 003
- ii. SR 007
- iii. SR 012
- iv. SR 017
- v. SR 028

f. Blockout (25mm only) Blockout


- i. White
- ii. Beige
- iii. Ivory

2. Accessories.

All accessories “Ivory” in colour.

3. Blind Types/Options

- Standard Corded – Cords open blind from bottom up only.
- Simplicity Cordless – Hand operated using handle, bottom up only.
- Top Down – Bottom Up Corded – Cords open blinds from bottom up or top down.
- Simplicity Cordless Top down – Bottom Up – Hand operated using handle to open blinds from bottom up or top down.

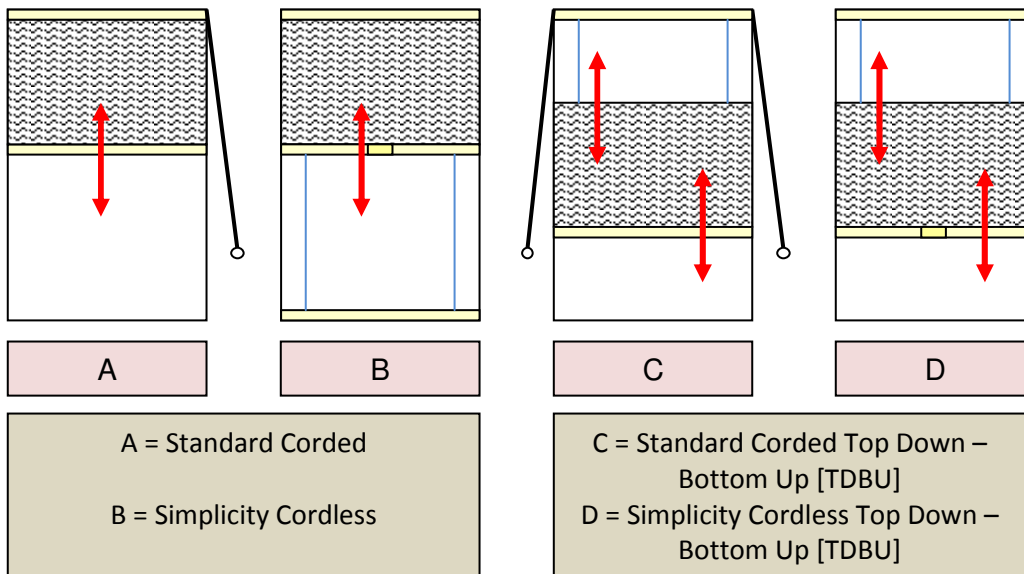

4. Maximum and Minimum Blind Sizes

Standard Cords				
Standard Corded Blinds	Minimum Width	Maximum Width	Minimum Drop	Maximum Drop
Polaris 25mm	300mm	2000mm	600mm	3000mm
Polaris 45mm	300mm	2000mm	600mm	3000mm
Duo Tone	300mm	2000mm	600mm	3000mm
Full Tone	300mm	2000mm	600mm	3000mm
Sheer	300mm	2000mm	600mm	3000mm
Blockout	300mm	2000mm	600mm	3000mm
Emboss	300mm	2000mm	600mm	3000mm

Top-Down/Bottom-Up With Cords				
TDBU Corded Blinds	Minimum Width	Maximum Width	Minimum Drop	Maximum Drop
Polaris 25mm	300mm	2000mm	600mm	3000mm
Polaris 45mm	300mm	2000mm	600mm	3000mm
Duo Tone	300mm	2000mm	600mm	3000mm
Full Tone	300mm	2000mm	600mm	3000mm
Sheer	300mm	2000mm	600mm	3000mm
Blockout	300mm	2000mm	600mm	3000mm
Emboss	300mm	2000mm	600mm	3000mm

Simplicity Cordless				
Standard Simplicity Blinds	Minimum Width	Maximum Width	Minimum Drop	Maximum Drop
Polaris 25mm	300mm	1000mm	600mm	3000mm
Polaris 45mm	300mm	1000mm	600mm	3000mm
Duo Tone	300mm	1000mm	600mm	3000mm
Full Tone	300mm	1000mm	600mm	3000mm
Sheer	300mm	1000mm	600mm	3000mm
Blockout	300mm	1000mm	600mm	3000mm
Emboss	300mm	1000mm	600mm	3000mm

Top-Down/Bottom-Up Simplicity Cordless				
TDBU Simplicity Blinds	Minimum Width	Maximum Width	Minimum Drop	Maximum Drop
Polaris 25mm	300mm	1000mm	600mm	3000mm
Polaris 45mm	300mm	1000mm	600mm	3000mm
Duo Tone	300mm	1000mm	600mm	3000mm
Full Tone	300mm	1000mm	600mm	3000mm
Sheer	300mm	1000mm	600mm	3000mm
Blockout	300mm	1000mm	600mm	3000mm
Emboss	300mm	1000mm	600mm	3000mm

5. Order Forms

Order forms must be placed electronically (emailed) on correct order form provided.

Orders to be sent to:

osloblinds@traxwest.com.au

NB: ALL ORDERS MUST BE PLACED USING THE ABOVE ORDERING PROCEDURES

6. Lead Times

Orders will be consolidated and placed with factory weekly. Orders will be available for dispatch from OSLO Blinds W.A. office generally within 21 days of order been placed with factory.

7. Warranty

Materials and Workmanship are covered for 3 years for normal use of blinds. Warranty does not include damage from abuse, inappropriate cleaning agents and methods, careless handling, freight, installers mishandling or blinds made outside of recommended sizing.

Product failure after 3 years will be assessed and should a legitimate claim be approved a pro-rata basis of correction will be applied.

8. Suitable Locations

Classique Blinds look great in almost any situation. However there are some environments that should be avoided –


- a. Very breezy or windy locations.
- b. In reach of pets or young children.
- c. Where blinds are continually moist. [Mildew will eventually form]
- d. In locations where chemicals are strong – e.g.: chlorine from indoor pool or spa.
- e. Outdoors.

9. Dye Lot

Minor dye lot variations will arise from time to time. Basic precautions should be taken.

- a. Within an order.
If blinds are immediately next to each other in the one location, it is advisable to state this when ordering.
- b. Subsequent orders.
Should the same colour fabric be ordered at a later date, it is expected that there will be a dye lot variation.
- c. Swatches.
When a customer selects a colour, they should be reminded that dye lot variation can happen, and the dye lot of the swatch will not be exactly the dye lot of the finished blinds.

10. Measuring.

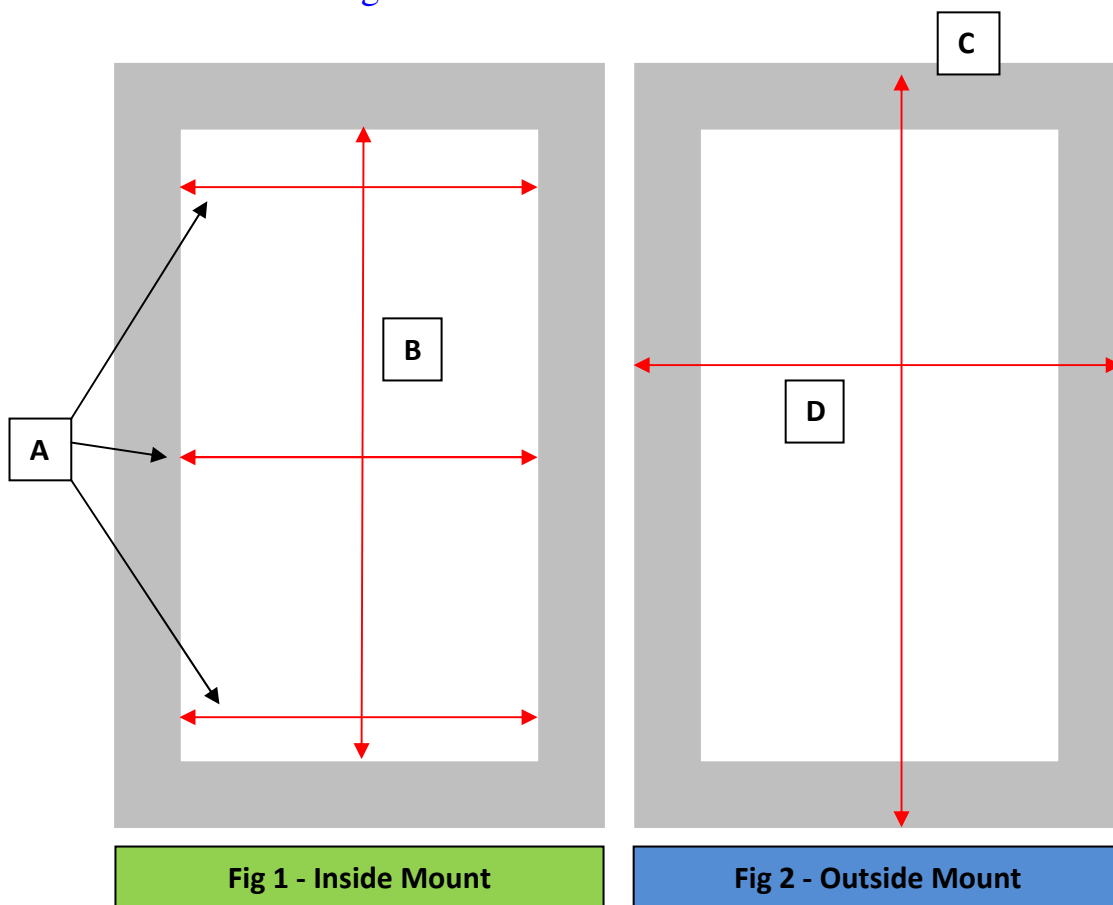

- a. Inside Mount [Reveal Installation] – SEE Fig 1.

Measuring for Inside mount is critical to ensure a great result.

- i. Measure Inside Reveal at “A” [width] and “B” [drop].

It is important that “A” is measured at the 3 points indicated. Clearance deduction for the width is 5mm. This should be taken off the NARROWEST measurement for the width.

- ii. To allow for some “spring-back” in cordless and blockout blinds no deductions are necessary for “B” – Drop. [In fact some choose to add a little to the drop to ensure privacy].

SUMMARY FOR INSIDE MOUNT DEDUCTIONS: Width - 5mm. Drop – Nil

- b. Outside Mount [Face Installation]

Measuring for Outside mount is not so critical UNLESS there are obstructions to take into account.

- i. Measure at “C” from Outside of Architrave to Outside of Architrave [More if desired].
NO DEDUCTIONS NECESSARY.
- ii. Measurement “D” is from top of architrave to bottom of architrave. No deductions necessary.

SUMMARY FOR OUTSIDE MOUNT DEDUCTIONS: None necessary.

11. Installation

Installation Brackets are Universal [Both Inside and Outside Mount].

Brackets may be installed at any point along the Head rail – preferably at a secure wall or reveal fixing point. [There may be some restriction over the spring box and cord spool]. [For low strength fitting situations, additional brackets to the recommended are advised].

At least one bracket should be located as near as possible to the control end of the blind to support the cord operation of the blind.

For simplicity blinds hold down brackets are installed on the sill to hold cord tension. Ensure that top brackets and bottom brackets are in vertical line.

12. Cleaning

Caution: Do not allow cleaning agents to come in contact with Fabric.

a. Fabric.

DO NOT USE CHEMICAL CLEANERS ON CLASSIQUE FABRIC.

i. General Cleaning

Your Classique blind may gather dust and from time to time need cleaning. Use a hair dryer on cold to gently remove dust, or use an anti-static soft brush or cloth to gently attract dust from the fabric.

ii. Spot Cleaning

The Classique fabric should be treated carefully and gently when spot cleaning. Use a damp cloth with a very mild detergent and gently “dab” the affected area. Harsh rubbing will remove the stiffening and possibly the colour of the fabric and distort its surface. It is vital that the fabric not be creased during this process.

iii. Insects.

Occasionally insects may get trapped and die in the blind cells. Use a hair dryer on cold and blow through the ends of the cells to remove the insects. Leaving insects inside the cells when drawing the blind up, may cause the fabric to mark.

13. Child Safety.

Always install Child Safety device. It is illegal ***not*** to install such devices. Safety labels must be left on the blinds.

14. Disclaimer.

The recommendations in this Reference Manual are a guide only. Individual interpretation based on specific jobs, will be necessary.