




# **SERIES 49 JAZZ**

Custom made blinds

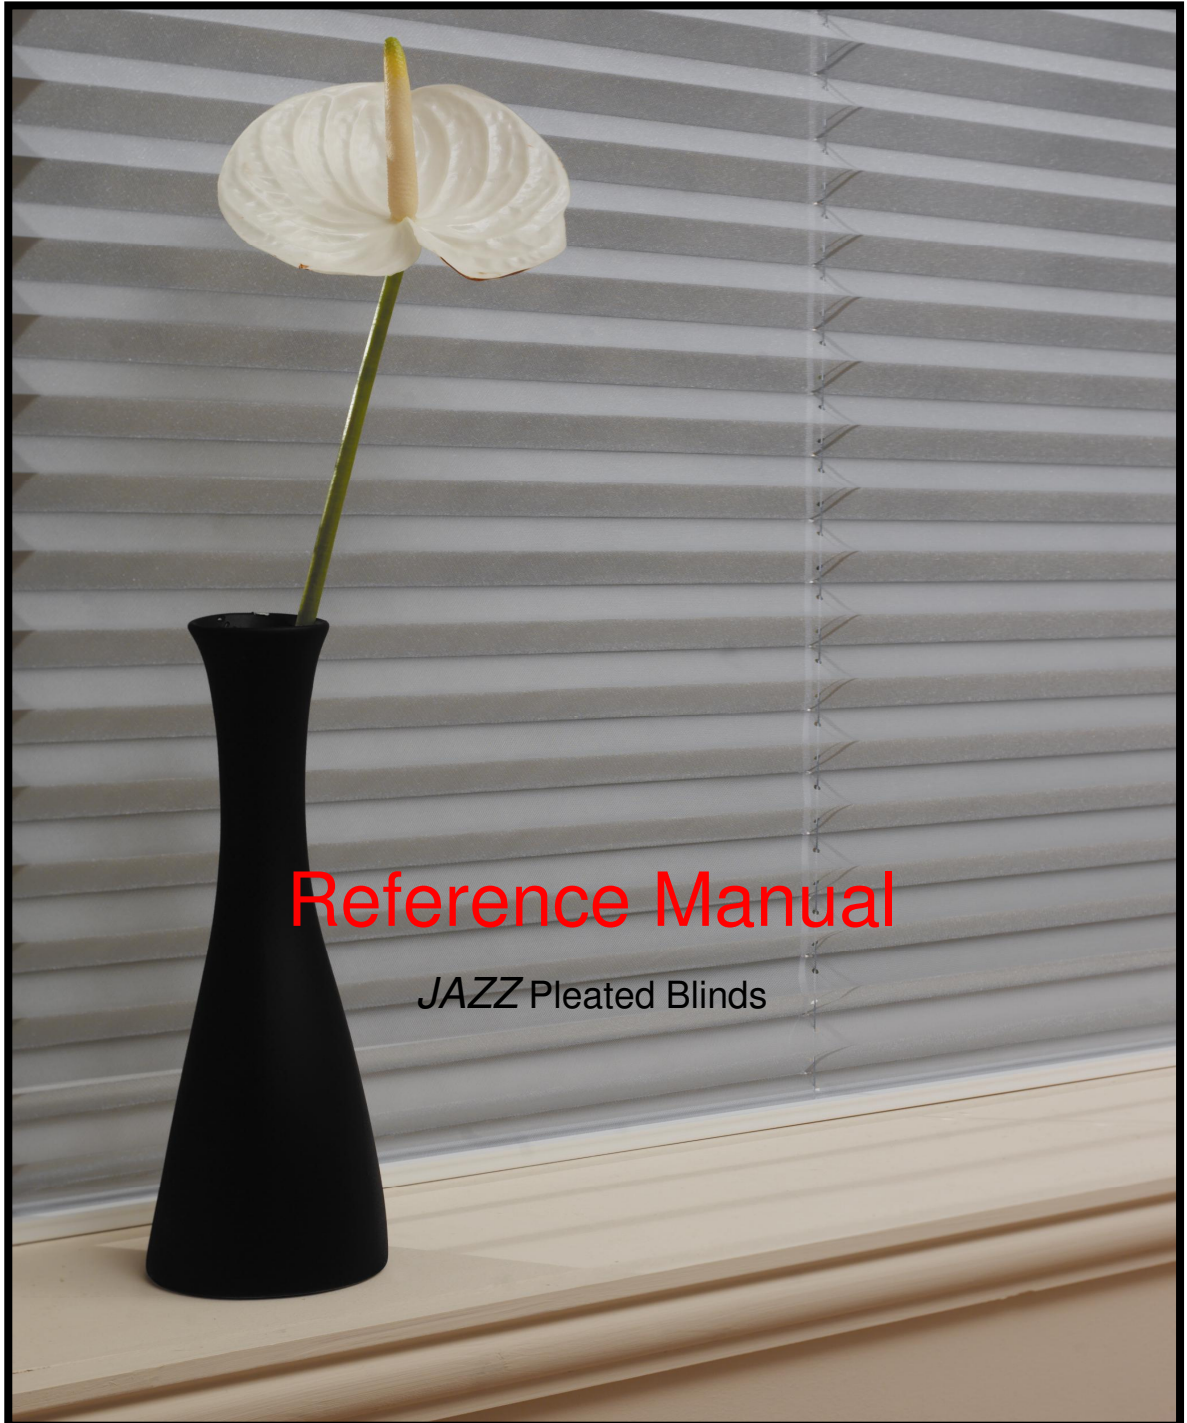

# SERIES 49 JAZZ

## Pleated BLINDS

### Fabrics.

#### A. SIMPLIO

- I. WHITE 01
- II. IVORY 02
- III. BEIGE 03
- IV. GREEN 40
- V. YELLOW 06
- VI. ORANGE 10
- VII. DARK GREEN 14
- VIII. W. BLUE 36
- IX. PINK ROSE 08
- X. DARK GREY 23
- XI. SKY BLUE 21
- XII. MAUVE 17
- XIII. ICE BLUE 28
- XIV. BLUE 22
- XV. PURPLE 18

#### B. NEO CARISMA

- I. SILVER A06
- II. GOLD A01
- III. BRONZE 05
- IV. BLUE A11
- V. GREEN A09
- VI. PURPLE A03

#### C. SUNSLIM (FIRE RETARDANT)

- I. 1812
- II. 1821
- III. 1832
- IV. 1852
- V. 1861

## 2. ACCESSORIES

ALL ACCESSORIES (INCLUDING HEAD AND BOTTOM RAIL) ARE IVORY FOR ALL COLOURS.

### 3. MAXIMUM AND MINIMUM BLIND SIZES

<b>Standard Cords</b>				
<b>Standard Cords</b>	<b>Minimum Width</b>	<b>Maximum Width</b>	<b>Minimum Drop</b>	<b>Maximum Drop</b>
Simplio	300mm	2000mm	500mm	3000mm
Neo Carisma	300mm	2000mm	500mm	3000mm
Sunslim 1800 FR	300mm	2000mm	500mm	3000mm

<b>Cords Top-Down/Bottom-Up</b>				
<b>Cords TDBU</b>	<b>Minimum Width</b>	<b>Maximum Width</b>	<b>Minimum Drop</b>	<b>Maximum Drop</b>
Simplio	300mm	2000mm	500mm	3000mm
Neo Carisma	300mm	2000mm	500mm	3000mm
Sunslim 1800 FR	300mm	2000mm	500mm	3000mm

<b>Simplicity Cordless</b>				
<b>Simplicity Cordless</b>	<b>Minimum Width</b>	<b>Maximum Width</b>	<b>Minimum Drop</b>	<b>Maximum Drop</b>
Simplio	300mm	1000mm	500mm	3000mm
Neo Carisma	300mm	1000mm	500mm	3000mm
Sunslim 1800 FR	300mm	1000mm	500mm	3000mm

<b>Simplicity Cordless Top-Down/Bottom-Up</b>				
<b>Simplicity Cordless TDBU</b>	<b>Minimum Width</b>	<b>Maximum Width</b>	<b>Minimum Drop</b>	<b>Maximum Drop</b>
Simplio	300mm	1000mm	500mm	3000mm
Neo Carisma	300mm	1000mm	500mm	3000mm
Sunslim 1800 FR	300mm	1000mm	500mm	3000mm

#### 4. LEAD TIMES

ORDERS FROM CUSTOMERS WILL BE CONSOLIDATED AND PLACED WITH FACTORY WEEKLY. ORDERS WILL BE AVAILABLE FOR DISPATCH FROM OSLO BLINDS W.A. OFFICE GENERALLY 21 DAYS OF ORDER BEEN PLACED WITH FACTORY.

#### 5. WARRANTY

MATERIALS AND WORKMANSHIP ARE COVERED FOR 3 YEARS FOR NORMAL USE OF BLINDS. WARRANTY DOES NOT INCLUDE DAMAGE FROM ABUSE, INAPPROPRIATE CLEANING AGENTS AND METHODS, CARELESS HANDLING, FREIGHT, INSTALLERS MISHANDLING OR BLINDS MADE OUTSIDE OF RECOMMENDED SIZING.

PRODUCT FAILURE AFTER 3 YEARS WILL BE ASSESSED AND SHOULD A LEGITIMATE CLAIM BE APPROVED A PRO-RATA BASIS OF CORRECTION WILL BE APPLIED.

#### 6. SUITABLE LOCATIONS

JAZZ BLINDS LOOK GREAT IN ALMOST ANY SITUATION. HOWEVER THERE ARE SOME ENVIRONMENTS THAT SHOULD BE AVOIDED —

- A. VERY BREEZY OR WINDY LOCATIONS.
- B. IN REACH OF PETS OR YOUNG CHILDREN.
- C. WHERE BLINDS ARE CONTINUALLY MOIST. [MILDEW WILL EVENTUALLY FORM]
- D. IN LOCATIONS WHERE CHEMICALS ARE STRONG — EG: CHLORINE FROM INDOOR POOL OR SPA.
- E. OUTDOORS.

#### 7. DYE LOT

MINOR DYE LOT VARIATIONS WILL ARISE FROM TIME TO TIME. BASIC PRECAUTIONS SHOULD BE TAKEN.

- A. WITHIN AN ORDER.

IF BLINDS ARE IMMEDIATELY NEXT TO EACH OTHER IN THE ONE LOCATION, IT IS ADVISABLE TO STATE THIS WHEN ORDERING.

- B. SUBSEQUENT ORDERS.


SHOULD THE SAME COLOUR FABRIC BE ORDERED AT A LATER DATE, IT IS EXPECTED THAT THERE WILL BE A DYE LOT VARIATION.

- C. SWATCHES.

WHEN A CUSTOMER SELECTS A COLOUR, THEY SHOULD BE REMINDED THAT DYE LOT VARIATION CAN HAPPEN, AND THE DYE LOT

OF THE SWATCH WILL NOT BE EXACTLY THE DYE LOT OF THE FINISHED BLINDS.

## 8. MEASURING.

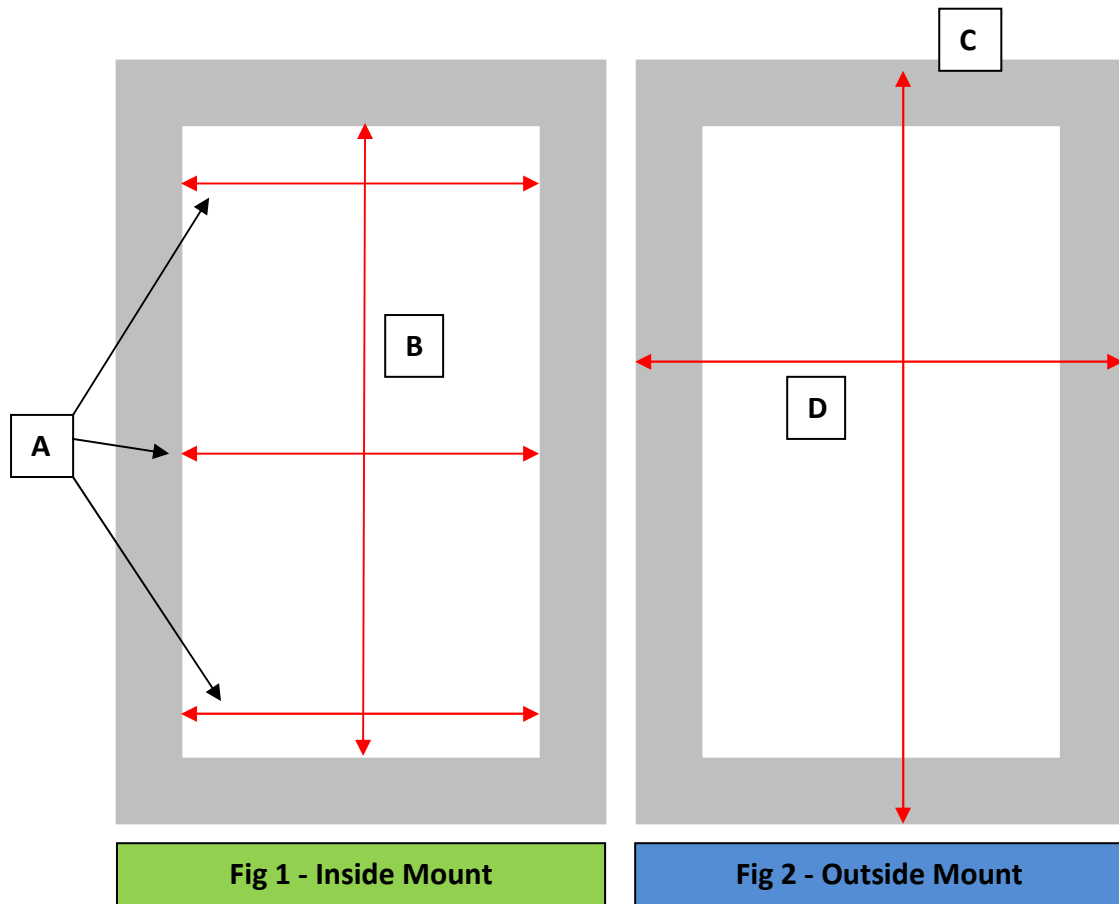

### A. INSIDE MOUNT [REVEAL INSTALLATION] – SEE FIG 1.

MEASURING FOR INSIDE MOUNT IS CRITICAL TO ENSURE A GREAT RESULT.

- I. MEASURE INSIDE REVEAL AT “A” [WIDTH] AND “B” [DROP].  
IT IS IMPORTANT THAT “A” IS MEASURED AT THE 3 POINTS INDICATED. CLEARANCE DEDUCTION FOR THE WIDTH IS 5MM. THIS SHOULD BE TAKEN OFF THE NARROWEST MEASUREMENT FOR THE WIDTH.
- II. TO ALLOW FOR SOME “SPRING-BACK” IN CORDLESS AND BLOCKOUT BLINDS NO DEDUCTIONS ARE NECESSARY FOR “B” – DROP. [IN FACT SOME CHOOSE TO ADD A LITTLE TO THE DROP TO ENSURE PRIVACY].

**SUMMARY FOR INSIDE MOUNT DEDUCTIONS: WIDTH - 5MM. DROP – NIL**

### B. OUTSIDE MOUNT [FACE INSTALLATION]

MEASURING FOR OUTSIDE MOUNT IS NOT SO CRITICAL UNLESS THERE ARE OBSTRUCTIONS TO TAKE INTO ACCOUNT.

- I. MEASURE AT “C” FROM OUTSIDE OF ARCHITRAVE TO OUTSIDE OF ARCHITRAVE [MORE IF DESIRED]. NO DEDUCTIONS NECESSARY.
- II. MEASUREMENT “D” IS FROM TOP OF ARCHITRAVE TO BOTTOM OF ARCHITRAVE. NO DEDUCTIONS NECESSARY.

**SUMMARY FOR OUTSIDE MOUNT DEDUCTIONS: NONE NECESSARY.**

**9. INSTALLATION**

INSTALLATION BRACKETS ARE UNIVERSAL [BOTH INSIDE AND OUTSIDE MOUNT].

BRACKETS MAY BE INSTALLED AT ANY POINT ALONG THE HEADRAIL — PREFERABLY AT A SECURE WALL OR REVEAL FIXING POINT. [THERE MAY BE SOME RESTRICTION OVER THE SPRING BOX AND CORD SPOOL]. [FOR LOW STRENGTH FITTING SITUATIONS, ADDITIONAL BRACKETS TO THE RECOMMENDED ARE ADVISED].

AT LEAST ONE BRACKET SHOULD BE LOCATED AS NEAR AS POSSIBLE TO THE CONTROL END OF THE BLIND TO SUPPORT THE CORD OPERATION OF THE BLIND.

**10. CLEANING**

**CAUTION:** DO NOT ALLOW CLEANING AGENTS TO COME IN CONTACT WITH FABRIC.

**DO NOT USE CHEMICAL CLEANERS ON JAZZ FABRIC.**

I. GENERAL CLEANING

YOUR JAZZ BLIND MAY GATHER DUST AND FROM TIME TO TIME NEED CLEANING. USE A HAIR DRYER ON COLD TO GENTLY REMOVE DUST, OR USE AN ANTI-STATIC SOFT BRUSH OR CLOTH TO GENTLY ATTRACT DUST FROM THE FABRIC.

II. SPOT CLEANING

THE JAZZ FABRIC SHOULD BE TREATED CAREFULLY AND GENTLY WHEN SPOT CLEANING. USE A DAMP CLOTH WITH A VERY MILD DETERGENT AND GENTLY “DAB” THE AFFECTED AREA. HARSH RUBBING WILL REMOVE THE STIFFENING AND

POSSIBLY THE COLOUR OF THE FABRIC AND DISTORT IS SURFACE. IT IS VITAL THAT THE FABRIC NOT BE CREASED DURING THIS PROCESS.

#### 11. CHILD SAFETY.

ALWAYS INSTALL CHILD SAFETY DEVICE. IT IS ILLEGAL NOT TO INSTALL SUCH DEVICES. SAFETY LABELS MUST BE LEFT ON THE BLINDS.

#### 12. DISCLAIMER.

THE RECOMMENDATIONS IN THIS REFERENCE MANUAL ARE A GUIDE ONLY. INDIVIDUAL INTERPRETATION BASED ON SPECIFIC Jobs, will be NECESSARY.