

SERIES 44 - OVATION



Product Information



*Traxwest Pty Ltd Trading as
Oslo Blinds W.A.
Unit 3/ 17 Gibberd Road Balcatta W.A. 6021
Ph: 08 9240 1234 Fax: 08 9240 1169
Email: orders@traxwest.com.au*

SERIES 44- OVATION

Custom Made Blinds

1. Fabrics.

1. Crystal 1208 Sonatine

- i. SN-CW15 Winter White
- ii. SN-CW24 Astoria
- iii. SN-CW36 Chamois
- iv. SN-CW39 Desert Grey
- v. SN-CW45 Pigeon Grey
- vi. SN-CW49 Earth Grey
- vii. SN-CW55 Lavender Blue
- viii. SN-CW57 Passion Violet
- ix. SN-CW75 Calypso Orange
- x. SN-CW79 Antique Mauve
- xi. SN-CW89 Seal Brown
- xii. SN-CW95 Black Jack

2. Natural N 1208

- i. NNW-23 Soft White
- ii. NNW-31 Mushroom
- iii. NNW-38 Mocha
- iv. NNW- 84 Black Brown

3. Urban Royal

- i. SN-UR15 Winter White
- ii. SN-UR45 Pigeon Grey
- iii. SN-UR58 Cobalt
- iv. SN-UR71 Purple
- v. SN-UR89 Seal Brown
- vi. SN-UR95 Black Jack

4. Silver Spectra N

- i. SN-SN15 Winter White
- ii. SN-SN45 Pigeon Grey
- iii. SN-SN58 Cobalt

- iv. SN-SN71 Purple
- v. SN-SN89 Seal Brown
- vi. SN-SN95 Black Jack

2. ACCESSORIES.

A. CASSETTE / BOTTOM BAR

CLEAR ANODISED

B. CORD

WHITE

C. CORD LENGTH [STANDARD CORD LENGTH]

- vii. 500
- viii. 750
- ix. 1000
- x. 1250
- xi. 1500
- xii. 1750
- xiii. 2000
- xiv. 2250
- xv. 2500

3. MAXIMUM AND MINIMUM BLIND SIZES

MINIMUM WIDTH	- 600MM
MAXIMUM WIDTH	- 3000MM
MINIMUM DROP	- 600MM
MAXIMUM DROP	- 2600MM

4. LEAD TIMES

ORDERS FROM CUSTOMERS WILL BE CONSOLIDATED AND PLACED WITH FACTORY WEEKLY. ORDERS WILL BE AVAILABLE FOR DISPATCH FROM OSLO BLINDS W.A. OFFICE GENERALLY 21 DAYS OF ORDER BEEN PLACED WITH FACTORY.

5. ORDER FORMS

ORDERS MUST BE PLACED ELECTRONICALLY (EMAILED) ON THE CORRECT ORDER FORM PROVIDED. ORDERS TO BE SENT TO OSLOBLINDSWA@TRAXWEST.COM.AU

NB: ALL ORDERS MUST BE PLACED USING THIS ORDERING SYSTEM.

6. WARRANTY

MATERIALS AND WORKMANSHIP ARE COVERED FOR 3 YEARS FOR NORMAL USE OF BLINDS. WARRANTY DOES NOT INCLUDE DAMAGE FROM ABUSE, INAPPROPRIATE CLEANING AGENTS AND METHODS, CARELESS HANDLING, FREIGHT, INSTALLERS MISHANDLING OR BLINDS MADE OUTSIDE OF RECOMMENDED SIZING.


PRODUCT FAILURE AFTER 3 YEARS WILL BE ASSESSED AND SHOULD A LEGITIMATE CLAIM BE APPROVED A PRO-RATA BASIS OF CORRECTION WILL BE APPLIED.

7. SUITABLE LOCATIONS

OVATION BLINDS LOOK GREAT IN ALMOST ANY SITUATION. HOWEVER THERE ARE SOME ENVIRONMENTS THAT SHOULD BE AVOIDED –

- A. VERY BREEZY OR WINDY LOCATIONS. [FABRIC EDGES WILL BE DAMAGED].
- B. IN REACH OF PETS OR YOUNG CHILDREN.
- C. WHERE BLINDS ARE CONTINUALLY MOIST. [MILDEW WILL EVENTUALLY FORM]
- D. IN LOCATIONS WHERE CHEMICALS ARE STRONG – EG: CHLORINE FROM INDOOR POOL OR SPA.
- E. OUTDOORS.
- F. WINDOWS WITH CONTROLS THAT ARE REACHED FOR BEHIND THE BLIND

8. MEASURING.

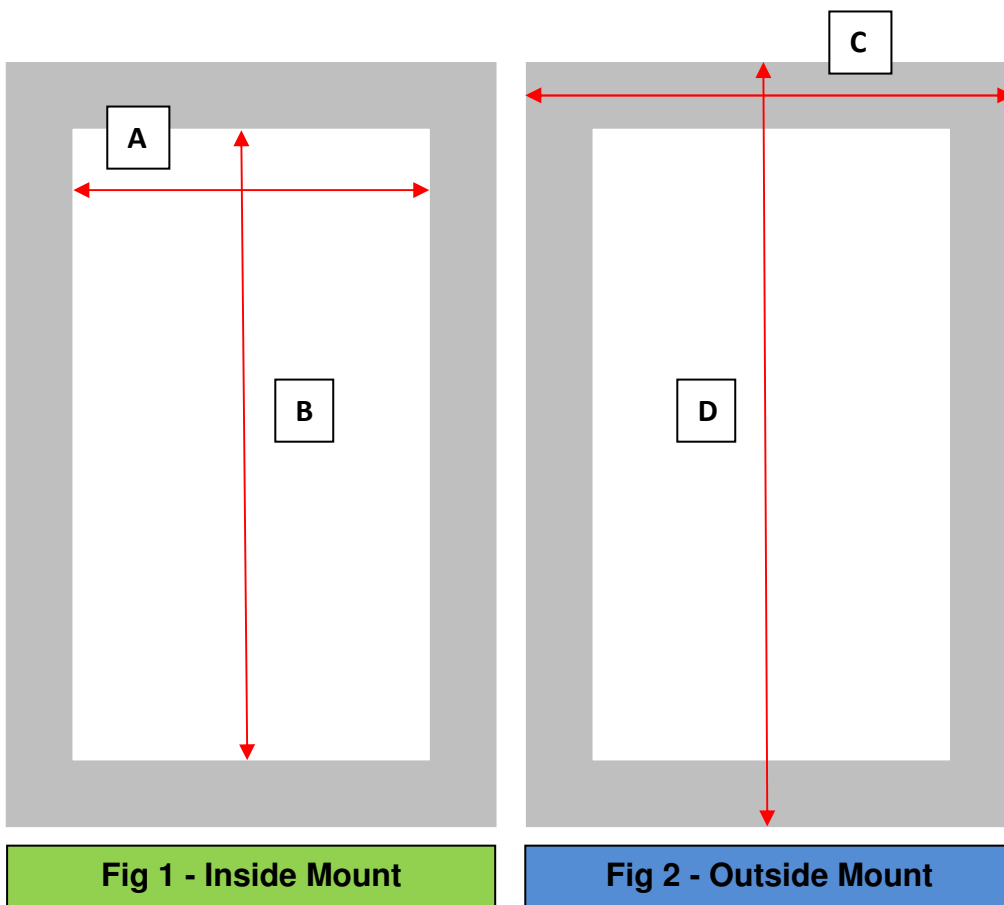

A. INSIDE MOUNT [REVEAL INSTALLATION] – SEE FIG 1.

I. MEASURE INSIDE REVEAL AT “A” [WIDTH] AND “B” [DROP].

IT IS IMPORTANT THAT “A” IS MEASURED WHERE THE CASSETTE WILL BE INSTALLED AS IT IS THE WIDEST PART OF THE BLIND. [THE CASSETTE IS APPROXIMATELY 60MM WIDER THAN THE FABRIC – ROUGHLY 30MM THE CONTROL SIDE, AND 30MM ON THE OPPOSITE END]. CLEARANCE DEDUCTION FOR THE WIDTH IS 5MM.

SUMMARY FOR INSIDE MOUNT DEDUCTIONS: WIDTH - 5MM.

B. OUTSIDE MOUNT [FACE INSTALLATION]

MEASURING FOR OUTSIDE MOUNT IS NOT SO CRITICAL UNLESS THERE ARE OBSTRUCTIONS TO TAKE INTO ACCOUNT.

I. MEASURE AT “C” FROM OUTSIDE OF ARCHITRAVE TO OUTSIDE OF ARCHITRAVE. NO DEDUCTIONS NECESSARY. [ADDITIONAL WIDTH CAN BE APPLIED TO ENSURE FABRIC COVERS ARCHITRAVE. FOR FABRIC TO COVER THE ARCHITRAVE THE WIDTH ORDERED NEEDS TO BE APPROX 60 – 65MM WIDER THAN MEASUREMENT “C”.

II. MEASUREMENT “D” IS FROM TOP OF ARCHITRAVE TO BOTTOM OF ARCHITRAVE. NO DEDUCTIONS NECESSARY.

SUMMARY FOR OUTSIDE MOUNT DEDUCTIONS: NONE NECESSARY.

9. INSTALLATION

INSTALLATION BRACKETS ARE UNIVERSAL [BOTH INSIDE AND OUTSIDE MOUNT].

BRACKETS MAY BE INSTALLED AT ANY POINT ALONG THE CASSETTE – PREFERABLY AT A SECURE FIXING POINT. [FOR LOW STRENGTH FITTING SITUATIONS, ADDITIONAL BRACKETS TO THE RECOMMENDED ARE ADVISED].

AT LEAST ONE BRACKET SHOULD BE LOCATED AS NEAR AS POSSIBLE TO THE CONTROL END OF THE BLIND TO SUPPORT THE CHAIN OPERATION OF THE BLIND.

IT IS VITAL THAT THE BRACKETS ARE FITTED PERFECTLY HORIZONTAL OTHERWISE THE BLIND WILL ROLL UP CROOKED AND FRAY THE FABRIC EDGES. INCORRECT INSTALLATION VOIDS WARRANTY ON FRAYED FABRIC.

10. CLEANING

A. CASSETTE AND BOTTOM RAILS.

ALUMINIUM SURFACES CAN BE CLEANED WITH A CLEAN SOFT CLOTH AND NORMAL HOUSEHOLD MILD CLEANING AGENT. **CAUTION:** *DO NOT ALLOW CLEANING AGENTS TO COME IN CONTACT WITH FABRIC.*

B. FABRIC.

DO NOT USE CHEMICAL CLEANERS ON OVATION FABRIC.

I. GENERAL CLEANING

YOUR OVATION BLIND MAY GATHER DUST AND FROM TIME TO TIME NEED CLEANING.

USE A HAIR DRYER ON COLD TO GENTLY REMOVE DUST, OR USE AN ANTI-STATIC SOFT BRUSH OR CLOTH TO GENTLY ATTRACT DUST FROM THE FABRIC.

II. **SPOT CLEANING**

THE OVATION FABRIC SHOULD BE TREATED CAREFULLY AND GENTLY WHEN SPOT CLEANING. USE A DAMP CLOTH WITH A VERY MILD DETERGENT AND GENTLY "DAB"THE AFFECTED AREA. HARSH RUBBING WILL REMOVE THE STIFFENING ON THE FABRIC AND DISTORT IS SURFACE. IT IS VITAL THAT THE FABRIC NOT BE CREASED DURING THIS PROCESS.

11. **DYE LOT**

MINOR DYE LOT VARIATIONS WILL ARISE FROM TIME TO TIME. BASIC PRECAUTIONS SHOULD BE TAKEN.

A. **WITHIN AN ORDER.**

IF BLINDS ARE IMMEDIATELY NEXT TO EACH OTHER IN THE ONE LOCATION, IT IS ADVISABLE TO STATE THIS WHEN ORDERING.

B. **SUBSEQUENT ORDERS.**

SHOULD THE SAME COLOUR FABRIC BE ORDERED AT A LATER DATE, IT IS EXPECTED THAT THERE WILL BE A DYE LOT VARIATION.

C. **SWATCHES.**

WHEN A CUSTOMER SELECTS A COLOUR, THEY SHOULD BE REMINDED THAT DYE LOT VARIATION CAN HAPPEN, AND THE DYE LOT OF THE SWATCH WILL NOT BE EXACTLY THE DYE LOT OF THE FINISHED BLINDS.

13. **DISCLAIMER**

THE RECOMMENDATIONS IN THIS REFERENCE MANUAL ARE A GUIDE ONLY. INDIVIDUAL INTERPRETATION BASED ON SPECIFIC JOBS, WILL BE NECESSARY