

oslo 
BLINDS W.A.

Starter Guide



Roman Blinds

custom made

oslo 
BLINDS W.A.


1. Roman Blinds Style

All Roman Blinds using side cord control are available with side cord to the front of the blind (Facade) or to the rear of the blind (Retrouse).

- **Classic** : Sewn pockets to the rear of the blind, cut edges.
- **Sewless** : Aluminum batten to the rear of the blind, cut edges.
- **Plantation** : Timber ½ round batten to the front & rectangular timber batten to the rear of the blind, cut edges.



Classic



Sewless



Plantation


Roman Blinds Operating Systems

- **Roman Cord Control with standard cord lock (width available up to 2410mm). with timber head rail**
Using cord and standard cord lock to control Roman Blind. This system has 2 type of headrail, Aluminium and Wooden.
- **Roman Cord Control with “Up/Down” cord lock (width available up to 2410mm).**
Using cord and new system called “Up/Down” cord lock to control Roman Blind. This system only needs one single pull to open/close the Roman Blind. This system has 2 type of headrail, Aluminium and Wooden.
- **Roman One Touch Control (width available up to 3010mm).**
Using chain and new system called “Auto Stop” to control Roman Blind. This system only needs one single pull (on the front of the chain) to switch Roman Blind from open to close position automatically. Available with Aluminium headrail. Supply covered option as our standard (the 3rd image on front page). The fabric (skin) is attached to the head rail with Velcro.
- **Roman Chain Control (width available up to 2410mm).**
Using chain to control Roman Blind from open to close position. Available with Aluminium headrail. Supply covered option as our standard (the 2nd image on front page). The fabric (skin) is attached to the head rail with Velcro.

2. Roman Blind Measurements

Provide neat width and drop measurements.

Outside Mount indicates blind is fitting onto architrave or wall around the window.



Outside mount

3. Roman Blinds Hardware Options

Lift Cord – White, Alabaster, Teak, Mahogany, Grey & Black colours.

CHAIN COLOURS (all styles, Roman Chain & One Touch)

All chain comes as continuous chain (without chain joiner). As an option, steel chains can also be supplied as a continuous length without a chain joiner. In plastic chain, length of 250, 500, 750, 1000 and 1500mm only available.

The colour may vary with the actual and is a representation only




Ivory plastic chain White plastic chain Black plastic chain Stainless steel chain Nickel plated steel Beige plastic chain Grey plastic chain

BATTEN COLOURS (Plantation style)

Made from real timber.

The colour may vary with the actual and is a representation only

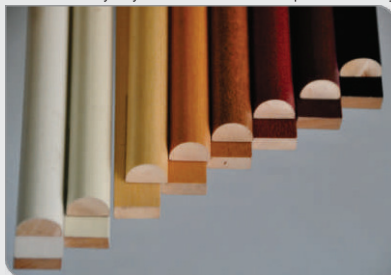

from left to right:

1. White
2. Alabaster
3. Natural
4. Baltic
5. Teak
6. Cherry
7. Brown
8. Black

5. Roman Blinds Pocket Spacing and Stacking

The distance between each pocket will vary depending on the drop and the operation system.

The approximate distance is 250mm to 380mm. Roman Blinds when fully drawn up will stack to an approximate depth of between 300mm to 450mm.

This will vary due to the drop length, blinds style and operation methods.

Roman Blinds

custom made



Classic Style with Facade Cord



Sewless Style with Retrousse Cord



Plantation Style with Facade Cord



Cord Pulley & Installation Bracket on Timber Headrail, in Roman with Standard Cord Lock



Cord Pulley & Cord Lock on Timber Headrail, in Roman with Standard Cord Lock



Roman Blind with Motorisation on Timber Headrail only

Roman Blinds

custom made



Chain Control in Roman with One Touch System




Chain Control in Roman with Chain Control System




One Touch, Chain Roman & Cord Roman Brackets



Plastic Cord Guide in Sewless style



Metal Cord Guide in Plantation style



Timber Batten Base Bar for Plantation only



Roman with Chain Control or One Touch System (Cover up chain)



Plain Trim Basebar for Classic & Sewless

FABRICS	FABRIC COMPOSITION PVC	POLYESTER	OPENNESS FACTOR	WEIGHT	THICKNESS	MAX BLIND WIDTH	COLOUR FASTNESS	FIRE RETARDANT
Viewscreen	85%	15%	5%	420g/m ²	0.58mm	2400mm	4 Grade	Yes
Shantung	84.5%	15.5%	10.8%	458g/m ²	0.8mm	2400mm	4 Grade	Yes
Esplanade (light filtering)	0%	100%	0%	230g/m ²	0.55mm	2400mm	5 Grade	N/A
Esplanade (blockout)	0%	100%	0%	400g/m ²	0.65mm	2400mm	5 Grade	N/A
Essentials	0%	100%	0%	315g/m ²	0.32mm	2300mm	5 Grade	N/A ^a
Vancouver	0%	100%	0%	310g/m ²	0.63mm	2400mm	4 Grade	N/A
Kirra (light filtering)	0%	100%	0%	282g/m ²	0.48mm	2400mm	5 Grade	N/A
Kirra (blockout)	0%	100%	0%	360g/m ²	0.66mm	2400mm	5 Grade	N/A
Natura (light filtering)	24 ^b	76%	0%	265g/m ²	0.54mm	2700mm	5 Grade	N/A
Natura (room darkening)	24 ^b	76%	0%	334g/m ²	0.61mm	2700mm	5 Grade	N/A
Harmony (light filtering)	0%	100%	0%	196g/m ²	0.43mm	2900mm	5 Grade	N/A
Harmony (room darkening)	0%	100%	0%	380g/m ²	0.68mm	2900mm	5 Grade	N/A
Outback (light filtering)	0%	100%	0%	274g/m ²	0.63mm	2400mm	4 Grade	N/A
Outback (room darkening)	0%	100%	0%	477g/m ²	0.77mm	2400mm	4 Grade	N/A
Avoca (light filtering)	0%	100%	0%	275g/m ²	0.66mm	2700mm	4 Grade	N/A
Avoca (blockout)	0%	100%	0%	450g/m ²	0.73mm	2900mm	4 Grade	N/A
Reflection	0%	100%	0%	420g/m ²	0.75mm	2900mm	5 Grade	N/A
Siam	0%	100%	0%	184g/m ²	0.35mm	2500mm	5 Grade	N/A
Arctic	0%	100%	0%	246g/m ²	0.53mm	2500mm	5 Grade	N/A
Cabaret	0%	100%	0%	450g/m ²	0.74mm	2900mm	5 Grade	N/A

^a Also available in Fire Retardant for Chalk and White Colours

^b Cotton not PVC

Care Instruction

ROUTINE CARE

A regular hand-held vacuum with low suction is suggested. When vacuuming avoid pulling or stretching the fabric. Rigorous vacuuming is not recommended, since this could distort the fabric.

CLEANING METHOD

When needed, can be cleaned by gently blotting with a soft, damp cloth or sponge, using warm soapy water mildew resistant. Be careful not to apply too much pressure to the blinds.

CHILD SAFETY

To comply with National Safety Regulations all of our products are supplied with Compulsory Child Safety Devices.

Manufacturing Standard

All fabrics are cut using the latest technology Screen fabrics are cut ultrasonically and OSLO W.A. does not rail road fabrics to ensure structural integrity of all blinds are maintained